


RG11 CMR COAXIAL CABLE
11CCSCMRRB: RG11 CMR COAXIAL 1000 FEET BLACK WOODEN REEL

Content of the Data Sheet				
Part number	11CCSCMRRB			
Category	RG11 CMR			
Test Standard	ETL			
Conductor	Material	Solid copper clad steel		
	Nom.O.D.(mm)	1.63	up	+0.01
			down	-0.01
Insulation	Material	Foam PE		
	Diameter	7.11±0.15 mm		
First Shield	Material	Aluminum/PET-Foil-Bonded		
Second Shield	Material	Aluminum Wire		
	Construction	0.15mm×16×6		
Sheath	Nom. Thickness	1.0mm		
	External O.D.	10.00±0.20 mm		
	Material	PVC (complies RoHS)		
	Color	BLACK		
Packing	Wooden Reel			
Weight	61.73 lbs			
Packing length	305M			
Sheath Physical Properties	Before Aging Tensile Strength (Mpa)	≥13.8		
	Elongation(%)	≥180		
Electrical Characteristics (20°C)	Nom. Center Conductor DC Resistance	13.0 ohm/kft		
	Velocity of Propagation (%)	85%		
	Nominal Capacitance	15.6 pF/ft		
	Impedance	75±3 Ohms		
	Jacket Spark Test Voltage	AC 3000V		
Temperature Range:	-20°C to +70°C			

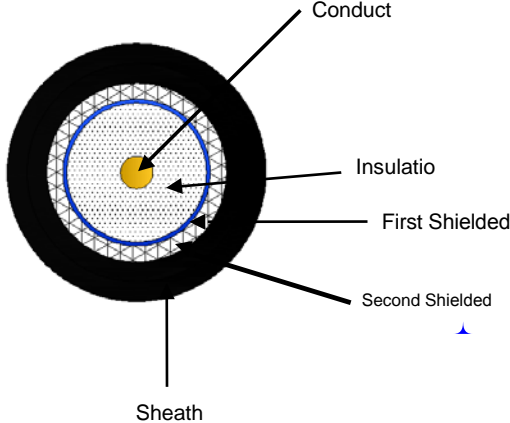

Nom.Attenuation (100ft):20°C

Frequency (MHz)	ATT (dB)
55	0.96
211	1.90
300	2.25
400	2.60
550	3.05
750	3.65
870	4.00
1000	4.36