


**RG59/U CCTV RISER 75 OHM BROADBAND COAXIAL CABLE**

**Cross Section**



**Part No.: 59SCCMRxx**

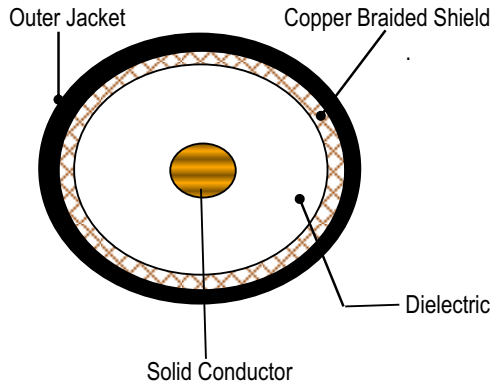

**Performance**

Attenuation			Return Loss	
Mhz	db/100ft	db/100m	Mhz	db
1	0.20	0.65	5-470	>20
10	0.82	2.69		
100	2.62	8.59		
400	5.45	17.88	470-860	>20
700	7.52	24.67	860-2500	>15
900	8.60	28.21		
1000	9.29	30.47		


**Description**

Rated Temperature(°C) 75  
 Product Rating CCTV/UL/CMR  
 Flammability Test CMR  
 Application  
 Digital, Analog, CATV, Satellite, Off-Air, Broadband  
 Communication  
 Reference Standard  
 NEC Article 800 and 820 Compliance

**Construction**

Conductor Solid Bare Copper  
 AWG 20awg.  
 Conductor Dia.(in.) 0.032in.  
 Dielectric Material Nitro Injected PE  
 Outer Diameter (in.) 0.144in.  
 Shields Number 2  
 Coverage 1st AP/APA  
 2nd 95% Copper Braid  
 Jacket Riser/PVC  
 Nom. Outer Diameter (in.) 0.24in.  
 Nominal Impedance 75ohm

**Standard Packaging**



1000' Spool in a Box



1000' Wooden Reel

Weight: 35 lbs.

**Jacket Color**

Standard

Black,White

\*All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%.

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.