


CAT5E 24AWG/4PAIR 350MHz F/UTP SHIELDED DIRECT BURIAL DUAL JACKET

PART NO. 5EOUTSHDDJRB

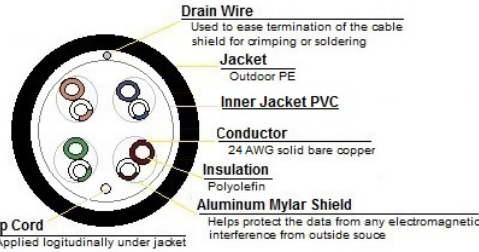

DESCRIPTION

- 24 AWG 4Pair F/UTP Category 5E cable tested to 350 MHz. Available on Wood Reels

FEATURES AND BENEFITS

- Structured cabling for Ethernet Networks
- Protects against environmental elements that can cause electrical performance failures
- Prevents moisture migration
- Performance guaranteed to 350 MHz
- Sequential footage markings
- Dual Jacket: UV Rated LLDPE Outer Jacket
- Verified by third-party for guaranteed performance

APPLICATIONS

- IEEE 802.3 1000Base-T, 100Base-TX, 10Base-T, PoE, PoE+
- CDDI, Token Ring, ATM
- Aerial, duct and buried installations
- Broadband and Baseband Analog Video

STANDARD COMPLIANCES

- ANSI/TIA 568-C.2
- ANSI/TIA 862 (Building Automation)
- ISO/IEC 11801 Ed. 2.0 (Class EI)
- ICEA 8-102-700 (Category 6 or 5E)
- REACH Compliant
- CPR Compliant (Fully Comply to 305/2011 & EN 50575:2014-09)
- RoHS Compliant Directive 2002/95/EG

PHYSICAL PROPERTIES

Conductor	Material	Copper
	Nominal Outside Diameter (mm)	0.515
Insulation	Material	HDPE
	Diameter (± 0.05mm)	0.96
Screen Material		Al-Foil
Construction		Direct Burial/Dual Jacket/Shielded
Jacket	Material	LLDPE/UV Rated
	Average Thickness (mm)	0.55
	Minimum Point Thickness (mm)	0.50
	Outside Diameter (±0.2mm)	5.7
Rip Cord:		250D Nylon
Drain Wire:		0.4 TC
Packing	Length	1000ft/Wood Reel
	Weight	26 lbs
Voltage Rating (Max)		300V



ELECTRICAL CHARACTERISTICS

1.0 - 250.0MHz characteristic impedance (ohms)		100±15
250-650.0MHz Delay Skew (ns/100m)		45
Pair-to-Ground Capacitance Unbalance (Pf/100m)		53
Max. Conductor DC Resistance Unbalance (%)		95
Max. Resistance Unbalance (%)		3
Max Mutual Capacitance		330
Max DC Loop Resistance		25
Min DC Insulation Resistance		-
Max Propagation Delay Skew		45
Before Aging	Tensile Strength (Mpa)	≥13.8
	Elongation (%)	≥300
After Aging	Tensile Strength (Mpa)	≥85% of unaged
	Elongation (%)	≥50% of unaged
Aging Period (°C x hrs)		100x240
Cold Bend (No Visible Crack)		-40±2°C
Temperature Range		-40 ~ 75°C
Velocity of Propagation (%) NVP		68



1000' Wood Reel
Weight: 26 lbs.

Toll Free: (866) 945-5051
Local: (770) 945-5051
Fax: (770) 945-9582
www.commoditycables.com



AVAILABLE CATEGORY 5E (PART NUMBERS)

PVC	Plenum	Shielded	Shielded Plenum	Direct Burial	Shielded Direct Burial
5ECMR150CO	5ECMP244Bx	5ESHDCMRBx	5ESHDCMPBx	5EOUT244RB	5EOUTGSHDRB
5ECMR244Bx	5ECMP150CO			5EOUTG244RB	5EOUTWSHDRB
5ECMR2425RG	5ECMP2425RO			5EOUTW244RB	5EOUTSHDDJRB
5ECMSTRxx				5EOUTA244RB	

*All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%.
It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice*

CAT5E 24AWG/4PAIR 350MHz F/UTP SHIELDED DIRECT BURIAL DUAL JACKET

PART NO. 5EOUTSHDDJRB

ELECTRICAL PERFORMANCE

ACRF - Attenuation to Crosstalk Ratio - Far End (dB/100m)

NEXT - Near End Crosstalk (dB/100m)

ACR - Attenuation to Crosstalk Ratio (dB/100m)

PSNEXT - Power Sum Near End Crosstalk (dB/100m)

ELFEXT - Equal Level Far End Crosstalk (dB/100m)

PSELFEXT - Power Sum Equal Level Far End Crosstalk (dB/100m)

RL - Return Loss (dB)

TCL - Transverse Conversion Loss (dB/100m)

ATT - Attenuation (dB/100m)

FREQUENCY (MHz)	ATT (dB/100m)	RL (dB)	ACR (dB)	Next (dB)	PSNEXT (dB)	TCL (dB/100m)	PHASE DELAY	ELFEXT (dB/100m)	PSELFEXT dB/100m)
1	2.0	20.0	63.3	65.3	62.3	n/s	570.00	63.8	60.8
4	4.1	23.0	52.2	56.3	53.3	n/s	552.00	51.8	48.8
8	5.8	24.5	46.0	51.8	48.8	n/s	546.73	45.7	42.7
10	6.5	25.0	43.8	50.3	47.3	n/s	545.38	43.8	40.8
16	8.2	25.0	39.0	47.2	44.2	n/s	543.00	39.7	36.7
20	9.3	25.0	36.5	45.8	42.8	n/s	542.05	37.8	34.8
25	10.4	24.3	33.9	44.3	41.3	n/s	541.20	35.8	32.8
31.25	11.7	23.6	31.2	42.9	39.9	n/s	540.44	33.9	30.9
62.5	17.0	21.5	21.4	38.4	35.4	n/s	538.55	27.9	24.9
100	22.0	20.1	13.3	35.3	32.3	n/s	537.60	23.8	20.8
200	32.4	17.4	-	30.8	27.8	n/s	536.50	17.8	14.8
300	41.0	16.5	-	29.3	26.3	n/s	536.10	14.3	11.3
350	44.9	16.0	-	27.1	24.1	n/s	535.90	12.9	9.9

Electrical performance with frequency over 250MHz is only for reference

JACKETS ABBREVIATION

AVAILABLE JACKET COLORS		
STANDARD	BLACK	
SPECIAL	Per Customer Request*	
INSULATION COLORS		
PAIR 1	BLUE	WHITE
PAIR 2	ORANGE	WHITE
PAIR 3	GREEN	WHITE
PAIR 4	BROWN	WHITE

Black	B	Last alphabetical character of each part number indicates the color code that the Jacket is available in. For example Part # 6CMR244Bx ("x" indicates all the colors to the left are available for this product.
White	W	
Gray	G	
Blue	O	
Yellow	Y	
Green	V	
Orange	OR	
Purple	P	
Red	R	
Pink	PI	

Toll Free: (866) 945-5051
Local: (770) 945-5051
Fax: (770) 945-9582
www.commoditycables.com



*All values in this specification are nominal and are subjective to tolerances of +/- 10 to 15%.

It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice*