

# 22/4 (1/0.61) Riser CMR/CL2R




Security and Control

SEC224BW - Security CABLE 22/4 (1/0.61) CMR/CL2R 1000' WHITE PULL BOX

Content of the Data Sheet

Part number	SEC224BW		
Voltage	300V		
Test Standard	UL444/UL13		
Conductor	Material	Solid Bare copper	
	Nom.O.D.(mm)	1/0.61	+/-0.01mm
Insulation	Material	PVC	
	Diameter	0.96±0.05 mm	
shielding	-----		
Sheath	Thickness	0.45±0.05mm	
	External O.D.	3.2+/-0.2 mm	
	Surface	Wavy	
	Material	FR- PVC(complies RoHS)	
	Color	white	
Surface Printing	Letter height	2.5±0.3mm	
	Color	BLACK	
	Print error & Space	≤±0.5%, 1m	
Core Color	1. Black, 2.Red,3.Green, 4.White		
Packing	1000FT/PULL BOX		
Weight	14.6 lbs/BOX		
Packing length	1000±4ft		
Rip-cord	Yes	Drain wire	No
Sheath Physical Properties	Before Aging Tensile Strength (Mpa)	≥10.0	
	Elongation(%)	≥100	
	Aging Period (°C × hrs)	100°C × 24h × 7d	
	After Aging Elongation(%)	≥75	
Electrical Characteristics (20°C)	Capacitance	190pf/m	
	-----	-----	
Electrical Characteristics (20°C)	DC Resistance (Ω/km) max	75	
	Spark test	2.0kv	
	Dielectric Test	1.5kv/min	
Temperature Range:	-20°C to + 75°C		MEET RoHS

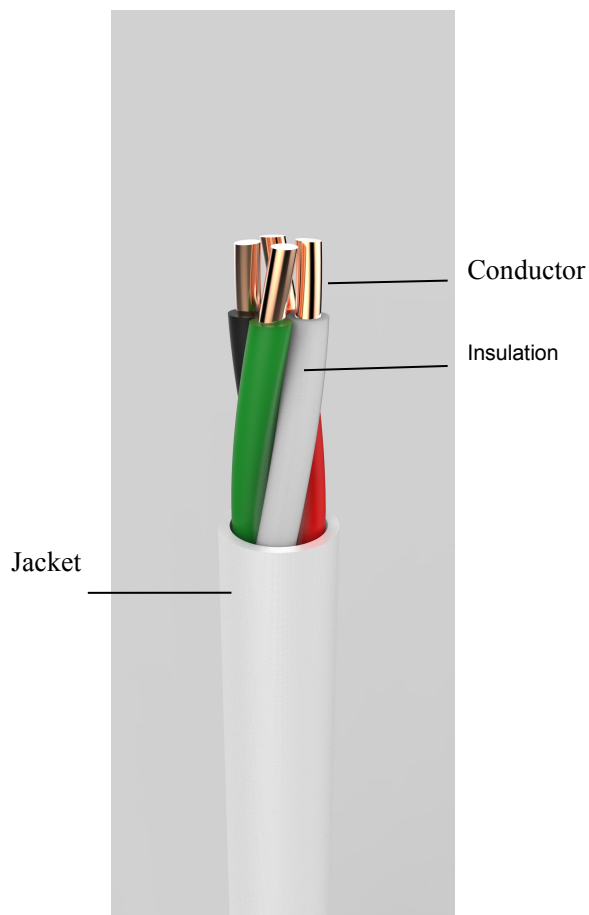

*\*All values in this specification are nominal and are subjective to tolerance of ±10 to 15%. It is the sole responsibility of the user to have the most current specification. Specifications are subject to change without notice.*